

# SRP-350V

3-inch Thermal POS Printer



Retail



Restaurants & Bars




Quick Service Restaurant



Coffee

# Reliable Steady Seller

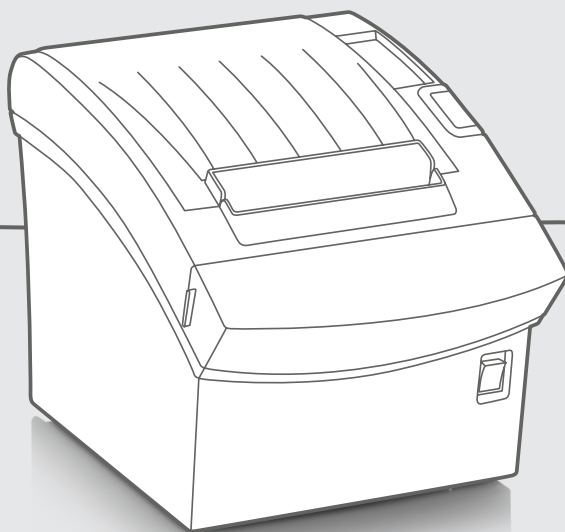

### Powerful Printing Performance

- Fast printing speeds up to 300 mm/sec
- Paper saving mode, reducing the length of a receipt up to 25%
- Part of the world-class SRP-350 line
- Energy Star certified



180 dpi    203 dpi



### User Convenience

- Supporting a Visibility Intelligence™ function for optimal print quality on Blue4est® paper
- Anti-jam guide
- 180 or 203 dpi options
- Optional B-melodist



### Multiple Interface Choice

- Built-in USB
- Optional Serial, Parallel or Ethernet

# SRP-350V

## 3-inch Thermal POS Printer

### Specifications

#### Print Characteristics

**Print Method**

Direct Thermal

**Print Speed**

SRP-350V: Up to 300 mm/sec  
SRP-352V: Up to 270 mm/sec

**Print Resolution**

SRP-350V: 180 dpi  
SRP-352V: 203 dpi

**Print Width**

Up to 72 mm

**Sensor**

Paper End, Paper Near End, Cover Open,  
Visibility Intelligence Sensor

#### Media Characteristics

**Media Type**

Receipt

**Media Width**

80 mm  
Optional 58 mm

**Media Roll Diameter**

Up to 83 mm

**Media Thickness**

0.05 ~ 0.08 mm

**Supply Method**

Easy Paper Loading

#### Physical Characteristics

**Dimensions (W x D x H)**

145 x 204 x 146 mm  
(5.70 x 8.03 x 5.74 inch)

**Weight**

1.6 kg (3.52 lbs.)

**Electrical**

EnergyStar Certified,  
External Power Adaptor 100-240 V AV, 50/60 Hz

**Drawer Port**

2 ports (Via y-type adaptor)

#### Performance Characteristics

**Memory**

64 Mb SDRAM, 64 Mb Flash

**NV Image Memory**

256 Kbytes (Mono)

**Receive Buffer**

4 Kbytes

**User Define Buffer**

12 Kbytes

**Interface**

Standard: USB V2.0 FS

Optional: ① USB V2.0 FS + Serial  
② USB V2.0 FS + Parallel  
③ USB V2.0 FS + Ethernet  
④ USB V2.0 FS + Dual Serial

#### Environment Characteristics

**Temperature**

Operating: 0 ~ 40 °C (32 ~ 104 °F)  
Storage: -20 ~ 60 °C (-4 ~ 140 °F)

**Humidity**

Operating: 10 ~ 80 % RH  
Storage: 10 ~ 90 % RH

#### Software

**Emulation**

BXL / POS

**Driver / Utility**

Windows Driver  
OPOS/JPOS Driver  
Linux/Mac CUPS Driver  
Virtual COM USB/Ethernet Driver  
Utility Program  
Network Auto Installer

**SDK / Plugin**

Android/iOS/Windows SDK  
Linux SDK  
Xamarin SDK  
Web Print SDK  
Cordova Plugin

**Application**

mPrint App (Android, iOS)

#### Fonts / Graphics / Symbologies

**Character Size**

Font A: 12 x 24, Font B: 9 x 17, Font C: 9 x 24,  
KOR, CHN, JPN: 24 x 24

**Characters Per Line**

SRP-350V: Font A: 42, Font B, C: 56,  
KOR, CHN, JPN: 21

SRP-352V: Font A: 48, Font B, C: 64,  
KOR, CHN, JPN: 24

**Character Sets**

Alphanumeric: 95  
Extended Graphics: 128 x 35 page  
International: 32

**Graphics**

Supporting user-defined fonts, graphics,  
formats, and logos

**Barcode Symbologies**

1D: Coda Bar, Code39, Code93, Code128, EAN-8,  
EAN-13, ITF, UPC-A, UPC-E

2D: Data Matrix, PDF417, QR Code

#### Accessories

**Standard**

USB A-B Cable 1.8 m

**Optional**

Built-in SMPS, Vertical stand, Wall mount,  
Splash Proof Cover, External buzzer, B-Melodist,  
Serial Cable (9-9/25-9 pin), Parallel Cable



BR\_SRP-350V\_EN\_MAR23\_V1

Copyright © BIXOLON Co., Ltd. All rights reserved. Features and specifications are subject to change without prior notice.

**BIXOLON**

www.BIXOLON.com

**BIXOLON Co., Ltd.**  
+82 31 218 5500  
sales@bixolon.com

**BIXOLON America Inc.**  
+1 858 764 4580  
sales@bixolonusa.com

**BIXOLON Mexico**  
+521 55 8852 7880  
marcelo@bixolonusa.com

**BIXOLON Europe GmbH**  
+49 211 68 78 54 0  
sales@bixolon.de

**BIXOLON MEA**  
+971 4 222 6480  
russell@bixolon.com